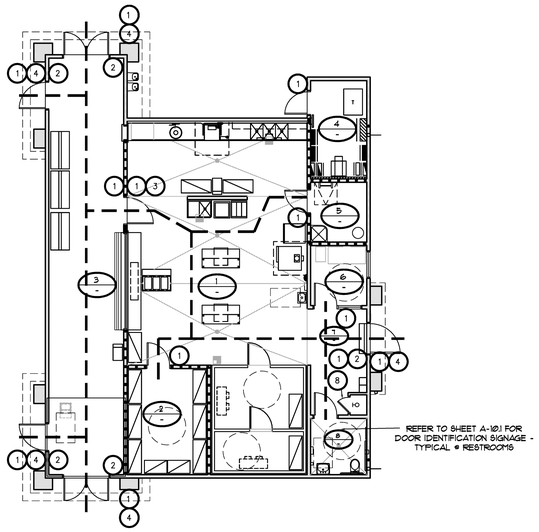

EXITING PLAN

SCALE: 1/8"=1'-0"

W S N E

SIGNAGE

1



2



3



4

THE INTERNATIONAL SYMBOL OF ACCESSIBILITY IS REQUIRED TO BE DISPLAYED ON ACCESSIBLE SPACES. THE SYMBOL IS A WHITE FIGURE ON A BLUE BACKGROUND. (COLOR No. 15090 FEDERAL STANDARD 595A)

5



OCCUPANT LOAD SIGN SHALL BE A DURABLE SIGN HAVING CONTRASTING COLOR FROM BACKGROUND 75 INCH (1 9) ATTACHED - SIGNAGE SHALL INDICATE NO. OF OCCUPANTS FOR DESIGNATED ROOMS. - MOUNT SIGN @ 84" ABOVE FLOOR - PER C.B.C. 1007.2.6 - SEE PLAN FOR LOAD FOR EACH AREA.

6

* PROVIDE SIGN @ TOP LANDING ONLY



* STAR SYMBOL SIGN @ BOTTOM LANDING ONLY

7



ASSISTIVE LISTENING SYSTEM PROVIDED

AT _____

PRIOR ARRANGEMENTS MUST BE MADE FOR EVENTS AFTER NORMAL BUSINESS HOURS.

FILL IN AS PERMANENT PART OF SIGN

PORTABLE ASSISTIVE-LISTENING DEVICES TO BE PROVIDED BY THE SCHOOL DISTRICT. PROPER SIGNAGE TO BE PROVIDED BY THE SCHOOL DISTRICT. SIGNAGE INSTALLATION SHALL BE INSTALLED BY THE CONTRACTOR(PER CBC 1104 B.2)

SIGN / TEXT REQUIREMENTS:

1. **Character type:** Characters on signs shall be raised 1/32" (0.794mm) minimum and shall be sans serif uppercase characters accompanied by Grade 2 Braille (see Note 5 below). C.B.C. 11178.5.6
2. **Character size:** Raised characters shall be a minimum of 5/8" (15.9mm) and a maximum of 2" (51mm) high.
3. **Finish and contrast:** Contrast between characters, symbols and their background must be 70% minimum and have a non-glare finish. 11178.5.2
4. **Proportions:** Characters on signs shall have a width-to-height ratio of between 3:5 and 1:1 and a stroke width-to-height ratio of between 1:5 and 1:10 inclusive. If all the text is all caps narrow. If all the text are passed, the typestyle is compliant with proportion code.
5. **Braille:** California Grade 2 Braille shall be used whenever Braille is required in other portions of these standards. Dots shall be 1/10" (2.54mm) on centers in each cell with 2/10" (5.08mm) space between cells, measured on the second column of dots in the first cell to the first column of dots in the second cell. Dots shall be raised a minimum of 1/40" (0.635mm) above to background. 11178.5.6



Note: Recommend Rounded or domed California Braille dots, each distinct and separate. Dots with straight sides and flat tops are not readable for many Braille users.

6. **Sign Material:** Sign material as specified w/ 1/32" raised border, graphics and letters. provide mechanical mounting w/ vandal resistant fasteners. comply with article 4.30 b. or4.30 of the ADAAG.

NOTE:
For restroom door identification symbols / signage see opening schedule.

8

NOTE TO INSTALLER:
INSTALL SIGN 60" ABOVE FINISH FLOOR CENTERED ON DOOR.

MISCELLANEOUS SIGNAGE

NOTE TO INSTALLER:
PROVIDE EXTERIOR SIGNAGE AT ALL BUILDINGS WITH EQUIPPED WITH A FIRE EXTINGUISHER. PROVIDE A MINIMUM OF (1) SIGN PER BUILDING. VERIFY LOCATION AND QUANTITY OF SIGNAGE REQUIREMENTS WITH THE STATE FIRE MARSHAL.

ROOM TITLES

- ONE-HOUR SEPERATION

- 1. KITCHEN
- 2. DRY STORAGE
- 3. SERVING LINE
- 4. ELECTRICAL
- 5. CUSTODIAN
- 6. OFFICE
- 7. ENTRY
- 8. UNISEX TOILET

KEY PLAN



LICENSED ARCHITECT
JAMES M. SHIMADA
C19096
RENEWAL 05/29/09
STATE OF CALIFORNIA

REVISION				
1	2	3	4	5

P S W C GROUP
ARCHITECTS / PLANNERS
1867 BUSINESS CENTER DR., SUITE 3, SAN BERNARDINO, CA. 92408
909/890-2233 FAX. 909/890-2844

ROOSEVELT II
ELEMENTARY SCHOOL
SAN BERNARDINO CITY UNIFIED CITY SCHOOL DISTRICT

BUILDING "K"
EXITING AND SIGNAGE PLAN
1/8" = 1'-0"

JOB NO. FPSGO
DRAWN BY - -
DATE 05-11-05

A-K2.1

RE-BID #F09-02 ROOSEVELT II (HENRY) E.S. NEW CONSTRUCTION BID ISSUANCE SET 12/09/11