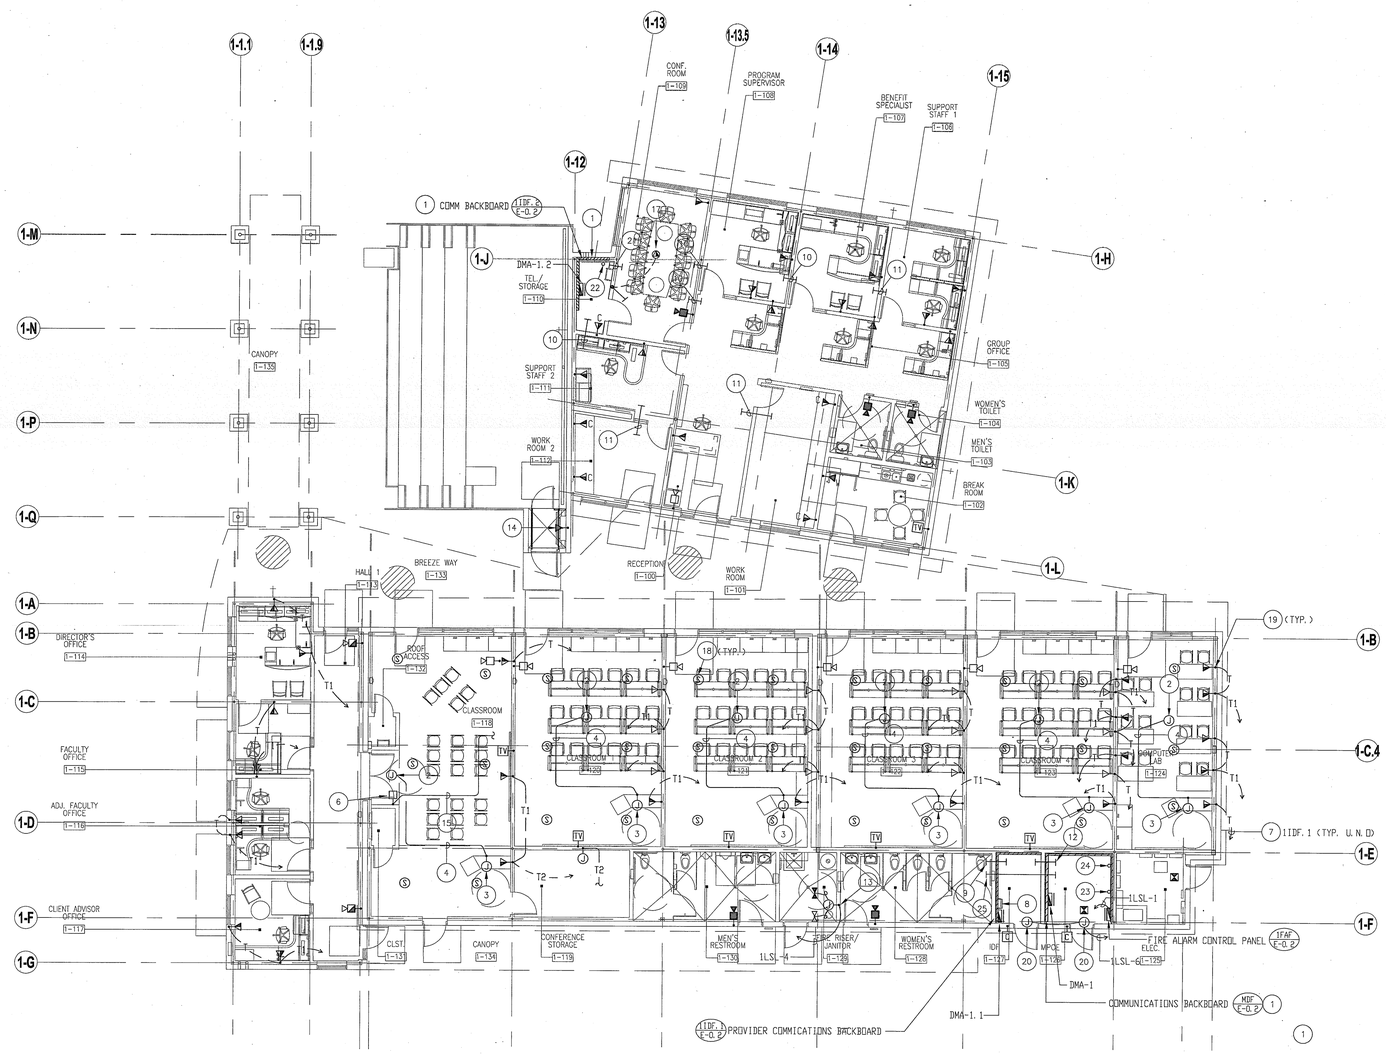

KEYNOTES

1. 3/4" THICK X 8'H. FIRE RETARDANT PLYWOOD BACKBOARD, WIDTH AS SHOWN. FIRE RATING LABEL MUST BE VISIBLE FOR CITY INSPECTOR VERIFICATION.
2. FLUSH MOUNT IN CEILING AT PROJECTOR SUPPORT.. COORDINATE FINAL LOCATION PRIOR TO ROUGH-IN.
3. FOR PROJECTOR PC JACK. COORDINATE FINAL LOCATION PRIOR TO ROUGH-IN.
4. 1 1/2"C.O. ROUTE CONDUIT FROM PODIUM/INSTRUCTOR DESK TO PROJECTORS THRU WALL.
5. CONNECT TO MOTORIZED PROJECTION SCREEN.
6. INSTALL AND CONNECT PROJECTION SCREEN SWITCH, +45". COORDINATE FINAL LOCATION PRIOR TO ROUGH-IN.
7. WHERE CONDUITS ARE SHOWN FOR TELEPHONE/DATA OUTLETS PROVIDE CONDUIT INDICATED. ROUTE CONDUITS BELOW FLOOR. WHERE CONDUIT IS NOT SHOWN FOR TELEPHONE/DATA OUTLETS PROVIDE 1"C. STUBBED INTO ACCESSIBLE CEILING SPACE.
8. CCTV POWER SUPPLY.
9. 1-2"C. SLEEVE. SEE NOTE 12.
10. 1-1 1/2"C. SLEEVE. SEE NOTE 12.
11. 1-1 1/4"C. SLEEVE. SEE NOTE 12.
12. PROVIDE CONDUIT SLEEVE THROUGH FULL HEIGHT WALL FOR VOICE, DATA, CATV CABLES. REFER TO DETAIL 1, SHEET E-2.2.3.
13. J-BOX FOR POWER CONNECTION TO FA TAMPER AND FLOW SWITCHES.
14. EMERGENCY TELEPHONE LINE FOR LIFT'S AUTODIALER TELEPHONE. COORDINATE TELEPHONE REQUIREMENT WITH LIFT PROVIDER/INSTALLER PRIOR TO ROUGH-IN.
15. 1/2"C.O. ROUTE CONDUIT FROM LEFT OF SCREEN HOUSING TO LV SWITCH LOCATION.
16. 2-4"C. SLEEVE. SEE NOTE 12.
17. REFERENCE POWER PLAN SHEET E-2.1.1 FOR FLUSH FLOOR MOUNTED MULTI-SERVICE OUTLET BOX.
18. COORDINATE FINAL LOCATION OF A/V SPEAKERS WITH AUDIO/VIDEO SYSTEM PROVIDER/INSTALLER PRIOR TO ROUGH-IN.
19. COORDINATE VOICE/DATA OUTLET EXACT LOCATION WITH FURNITURE PLANS IN CLASSROOMS.
20. MOUNT J-BOX ABOVE DOOR FOR POWER CONNECTION TO SECURITY DOOR HARDWARE COORDINATE WITH SECURITY SYSTEM PROVIDER/INSTALLER PRIOR TO ROUGH-IN.
21. 1-4"C. SLEEVE. SEE NOTE 12.
22. 2-4" CONUITS FROM MPOE ROOM, BLDG. 1. STUB 6' A.F.F.
23. 8-4" CONDUITS TO BLDGS, 1A, 2, 3, AND 4. SEE BLOCK DIAGRAMS, SHEET E-0.2 FOR QUANTITY AND SIZES OF CONDUIT. STUB 6' A.F.F.
24. 1-4" AND 1-2" CONDUITS TO UTILITY SERVICE TAPPING POINT FOR TELEPHONE AND CATV RESPECTIVELY. SEE PLAN SHEET E-1.1.
25. 3-3"C. SLEEVES. SEE NOTE 12.

KEYPLAN



BUILDING 1 - SIGNAL PLAN

SCALE: 1/8"=1'-0"

1

County of Orange
OC PUBLIC WORKS
Architecture & Engineering

Revisions

Sym.	Descrip.	Date	By

0742

Consultants

FBA ENGINEERING
Consulting Engineers
3600 Inland Empire Blvd. Suite 310 Ontario, California 91764
T: 909 592 0900 F: 909 592 5997
FBA@fbaeng.com
FBA # 446.025

Drawn ___ Chkd. ___ Date 12-26-09

A-E Seal

A-E ALEXANDER + HIBBS, AIA, INC.

ALEXANDER + HIBBS ARCHITECTS
Architecture and Planning
2400 N. Glassell St. Suite A
Orange, California 92865
(714) 974-7888

Design RH Chkd. JP Date Nov. 26, 2009

Sht Title BUILDING 1 - SIGNAL PLAN
Project COUNTY OF ORANGE HEALTH CARE AGENCY
401 SOUTH TUSTIN STREET
401 SOUTH TUSTIN STREET
ORANGE, CA 92866
PROJ. NO. 100-042-P210-4200

Plan No.
52333-03608

Sheet
E-2.1.3

0742 COUNTY OF ORANGE HEALTH CARE AGENCY 401 SOUTH TUSTIN STREET