

LOADING KEY PLAN

LOADING SCHEDULE - SECOND FLOOR			
MARK	AREA DESCRIPTION	GRAVITY DEAD LOAD (PSF)	LIVE LOAD (PSF)
8	TYPICAL FLOOR	76	40/100 (REDUCIBLE)
6	TYPICAL ROOF	32	20 (REDUCIBLE)

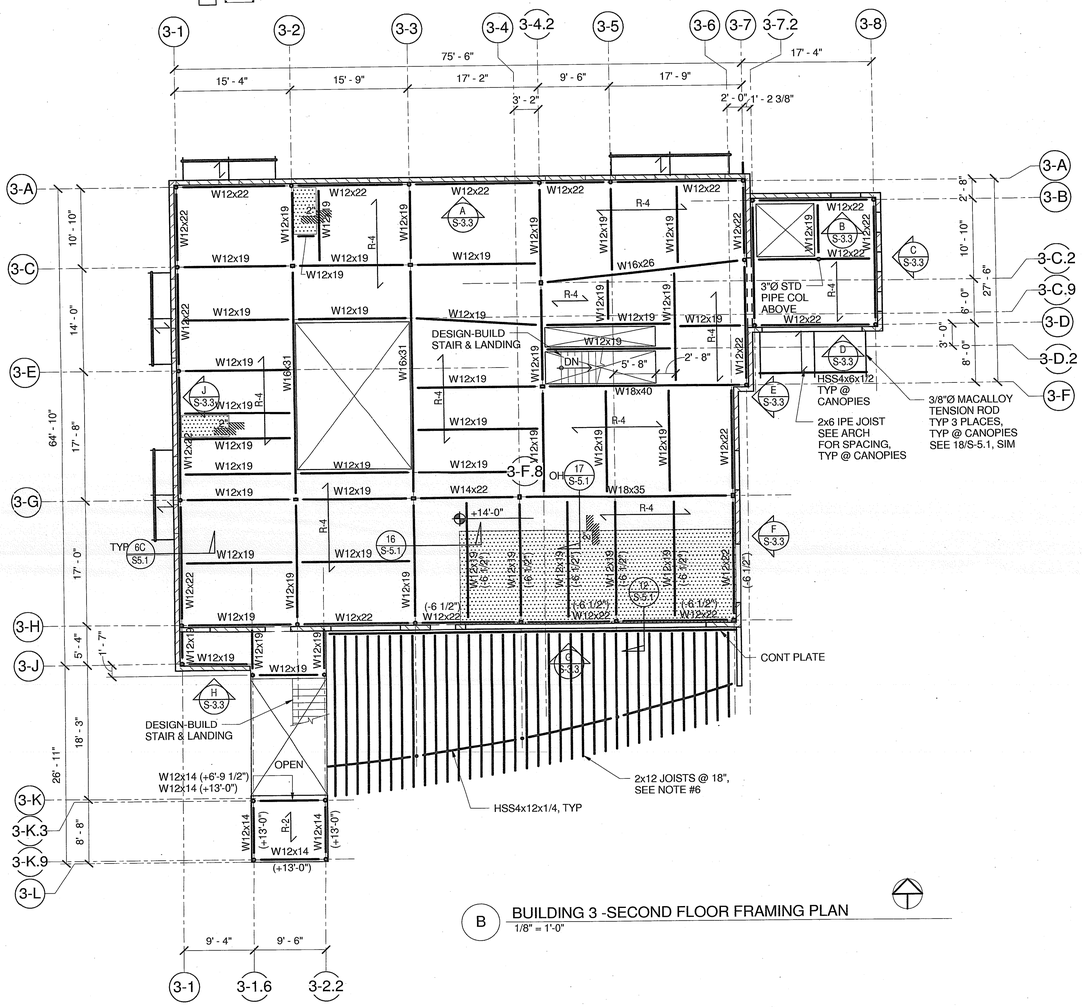

B BUILDING 3 -SECOND FLOOR FRAMING PLAN
1/8" = 1'-0"

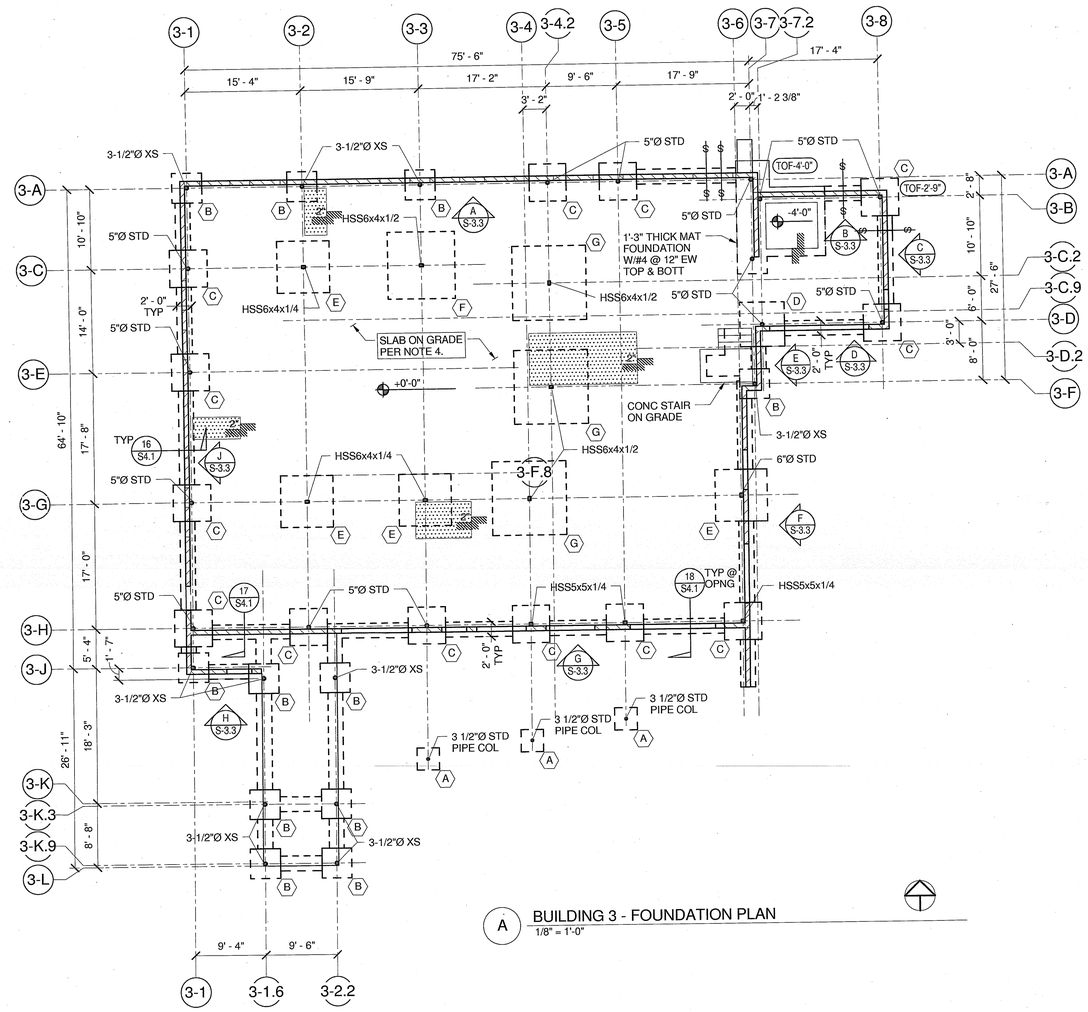

A BUILDING 3 - FOUNDATION PLAN
1/8" = 1'-0"

LEGEND:

+X'-X" INDICATES TOP OF STRUCTURAL CONCRETE SLAB

(X'-x") INDICATES TOP OF STEEL FROM 0'-0" DATUM. FOR TOP OF STEEL AT CONC DECKS SEE FRAMING PLAN NOTE 2.

R-1A INDICATES EPICORE 3.5A 16 GA. METAL ACOUSTIC DECK 20'-0" MAX. SPAN, (2 SPANS MIN.) DECK WELDING: 3-1/2"Ø EFF. PUDDLE WELDS PER SUPPORT, 3/4"Ø PUDDLE WELDS @ 12" @ MARGINS, 1-1/2" LONG ARC SEAMWELD @ SIDE LAP CONNECTION @ 24".

R-1B INDICATES EPICORE 3.5 16 GA. METAL NON-ACOUSTIC DECK 20'-0" MAX. SPAN, (2 SPANS MIN.) UNO. DECK WELDING: 3-1/2"Ø EFF. PUDDLE WELDS PER SUPPORT, 3/4"Ø PUDDLE WELDS @ 12" @ MARGINS, 1-1/2" LONG ARC SEAMWELD @ SIDE LAP CONNECTION @ 24.

R-2 INDICATES 1 1/2" TYPE HSB-36 VERCO DECK, 18 GA., 10'-0" MAX SPAN (2 SPAN MIN), UNO. DECK WELDING : 5 1/2" Ø EFF. PUDDLE WELDS PER SUPPORT, 3/4"Ø PUDDLE WELDS @ 12" @ MARGINS, BUTTON PUNCH @ 12" SIDE LAP.

R-3 INDICATES W2 FORMLOK 18 GA. METAL DECK WITH 2 1/2" THICK LIGHT WEIGHT CONCRETE FILL OVER TOPS OF FLUTES (TOTAL SLAB DEPTH 4 1/2") WITH #4@18" (EA. WAY) (1" CLEAR FROM TOP OF SLAB). 10'-0" MAX SPAN. UN-SHORED. DECK WELDING: 4-1/2"Ø EFF. PUDDLE WELDS PER SHEET PER SUPPORT, 3/4"Ø PUDDLE WELDS @ 12" @ MARGINS, BUTTON PUNCH @ 36".

R-4 INDICATES W2 FORMLOK 18 GA. METAL DECK WITH 2 1/2" THICK LIGHT WEIGHT CONCRETE FILL OVER TOPS OF FLUTES (TOTAL SLAB DEPTH 4 1/2") WITH #4@18" (EA. WAY) (1" CLEAR FROM TOP OF SLAB). 10'-0" MAX, SPAN, UN-SHORED. DECK WELDING: 4-1/2"Ø EFF. PUDDLE WELDS PER SHEET PER SUPPORT, 3/4"Ø PUDDLE WELDS @ 12" @ MARGINS, BUTTON PUNCH @ 36".

INDICATES FLOOR/ROOF OPENING. FOR SIZE AND LOCATION SEE ARCH AND MEP DRAWINGS. WHERE FRAMING NOT SHOWN PROVIDE STEEL FRAMING EACH SIDE OF OPENING PER TYPICAL DECK DETAILS ON S1.6

INDICATES NON-BEARING CMU SHEAR WALL (PLAN)

INDICATES NON-BEARING CMU SHEAR WALL BELOW (PLAN)

FRAMING PLAN NOTES:

1. FOR GENERAL NOTES AND TYPICAL DETAILS, SEE S-1.1 THRU S-1.7
2. TOP OF STRUCTURAL STEEL SHALL BE 4 1/2" BELOW TOP OF STRUCTURAL CONCRETE SLAB, UNO (-X")
3. VERIFY FLOOR ELEVATIONS WITH ARCHITECTURAL DRAWINGS. SEE ARCHITECTURAL DRAWINGS FOR OPENINGS AND SLAB DIMENSIONS.
4. BEAMS SHALL BE EQUALLY SPACED ACROSS Wx GIRDERS UNLESS SHOWN OR UNLESS NOTED OTHERWISE ON PLANS.
5. REFER TO ARCHITECTURAL DRAWINGS FOR SLAB SLOPES, CURBS, GUTTERS, VENTS, DRAINS, ETC., AND DIMENSIONS NOT SHOWN. REFER TO MECHANICAL/PLUMBING DRAWINGS FOR DUCT OPENINGS AND EQUIPMENT PAD/CURB SIZES AND LOCATIONS, ETC.
6. ALL WOOD AT TRELLIS SHALL BE IRON WOODS IPE SEE ARCH AND SPECIFICATIONS FOR MORE INFORMATION.
7. ALL BEAMS AT SECOND FLOOR SUPPORTING R-4 DECK SHALL HAVE 3/4" Ø WELDED STUDS AT 12" PER DETAIL 13/S1.6

FOUNDATION PLAN NOTES:

1. FOR GENERAL NOTES AND TYPICAL DETAILS SEE S-1.1 THRU S-1.7
2. 5" SLAB ON GRADE W/ #4 @ 16 " EW, TYP UNO. SEE GEOTECH REPORT FOR GRAVEL, SAND & VISQUEEN LAYERS REQUIRED BELOW SLAB.
3. REFER TO ARCHITECTURAL DRAWINGS FOR SLAB SLOPES, GUTTERS, VENTS, DRAINS, SADDLES, ETC. AND DIMENSIONS NOT SHOWN. REFER TO MECHANICAL/PLUMBING DRAWINGS FOR EQUIPMENT PAD SIZES AND LOCATIONS, ETC.
4. TYPICAL TOP OF FOOTING -1'-6" BELOW TOP OF SLAB, UNO.

County of Orange
OC PUBLIC WORKS
Architecture & Engineering

Revisions

Sym.	Descrip.	Date	By

Consultants
JOHN A. MARTIN & ASSOCIATES
Structural Engineers
950 S. Grand Avenue
Los Angeles, CA 90015
Phone (213) 483-6490
Fax (213) 483-2664

Drawn	Chkd.	Date 11:36:59

A-E Seal
REGISTERED PROFESSIONAL ENGINEER JACQUELINE VINNAK No. 4472 Exp. 12/31/10 STRUCTURAL STATE OF CALIFORNIA

A-E
ALEXANDER + HIBBS, AIA, INC.
ALEXANDER + HIBBS, AIA, INC.
Architecture and Planning
1000 N. Anaheim Blvd. Suite A
Anaheim, CA 92806
(714) 635-3300

Design	Chkd.	Date NOV 26, 2009

Sht Title BUILDING 3 - FOUND. & SECOND FLOOR FRAM. PLANS
Project COUNTY OF ORANGE HEALTH CARE AGENCY
401 SOUTH TUSTIN STREET
401 SOUTH TUSTIN STREET
ORANGE, CA 92866
PROJ. NO. 100-042-P210-4200

Plan No.
52333-03608

Sheet
S-2.3.1