NOTES

1. WIREMOLD MOUNTED ABOVE BACKSPLASH. TWO CIRCUITS.
2. MAIN TELEPHONE TERMINAL BOARD "MTTB". PROVIDE 8' X 8' X3/4" PLYWOOD COATED WITH FIRE RESISTANT PAINT. PROVIDE 1/2"C,1¢6 AWG COPPER WIRE GROUND FROM AN APPROVED GROUND TO BACKBOARD. COORDINATE WITH TELEPHONE COMPANY FOR ANY ADDITIONAL REQUIREMENTS.
3. 30A2P DISC., 15A F.S. 1Ø CHEMICAL PUMP. TYPICAL.
4. NOT USED
5. POWER FOR SECURITY GRILL, PROVIDE COMPLETE SYSTEM.
6. POWER FOR AV EQUIPMENT INSIDE CABINET. CONFIRM HEIGHT WITH SUPPLIER. ALL PROJECTOR WIRES TO BE PULLED TO THIS LOCATION.
7. POWER FOR UNDER COUNTER REFRIGERATOR.
8. POWER FOR SANITIZER. CONFIRM HEIGHT WITH ARCHITECT.
9. POWER FOR VACUUM CANISTER.
10. 3/4" C.O. TO "TTB".
11. 1" C.O. TO SITE P.I.V. TAMPER SWITCH AT SHUT-OFF VALVE (BACKFLOW PREVENTER). INFORMATION TO BE VERIFIED WITH SUPPLIER.
12. JUNCTION BOX FOR CONNECTION OF FIRE SPRINKLER.
19. SPRINKLER MONITORING PANEL (BY OTHERS) INFORMATION AND LOCATION TO BE VERIFIED.
14. POWER FOR ELECTRIC ROLL-UP DOORS. INFORMATION AND LOCATION TO BE VERIFIED.
15. POWER FOR DISHWASHER. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH MANUFACTURER.
16. POWER FOR MICROWAVE. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH MANUFACTURER.
17. POWER AND CABLE T.V. FOR FLAT SCREEN T.V. COORDINATE EXACT LOCATION AND ALL REQUIREMENTS WITH AUDIO VISUAL CONTRACTOR.
18. CEILING MOUNTED PROJECTOR. OPCI
19. 1" TO AV CABINET.
20. MOTORIZED PROJECTION SCREEN WITH SWITCH. INFORMATION TO BE VERIFIED WITH SUPPLIER.
21. POWER AND CABLE FOR FUTURE CREMATORY. PROVIDE 1" C.O. STUBBED INTO MAIN ELECTRIC ROOM.
22. 1"C.O. TO CARD READER/INTERCOM AT GATE.
23. POWER TO BE COORDINATED WITH MODULAR FURNITURE.
24. DISPATCH REQUIREMENTS TO BE VERIFIED WITH OWNER.
25. DEVICE HEIGHT TO BE VERIFIED.
26. CIRC PUMP
27. J-BOX FOR CONNECTION OF MOTORIZED CAMERA. VERIFY MOUNTING WITH SECURITY CONTRACTOR.
28. CARD ACCESS SYSTEM.
29. J-BOXES ABOVE CEILING FOR CARD ACCESS SYSTEM. PROVIDE 1"C.O. TO (28) FROM EACH DOOR.
30. MOTORIZED DOOR. PROVIDE CONNECTION TO OPERATORS.
31. HELP BUTTON. PROVIDE CONDUIT TO BUZZER IN DISPATCH ROOM.
32. J-BOX FOR CONNECTION OF VAV BOX. 2 FLA, 120V1Ø
33. SOUND SYSTEM, VERIFY LOCATION



ENLARGED I.T. ROOM
1/4" = 1'-0"
B E3.1

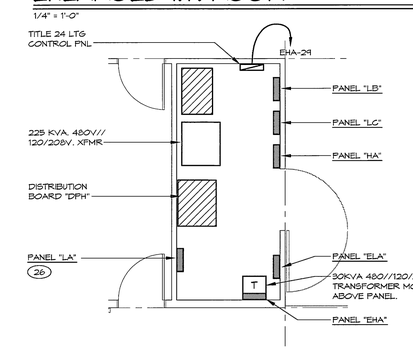

ENLARGED ELECTRIC ROOM
1/4" = 1'-0"
A E3.1

SWATT | MIERS ARCHITECTS

5845 Doyle Street,
Suite 104
Emeryville, CA 94608
Tel: 510 985 9779
Fax: 510 985 0116
www.swattmiers.com

JAN 19 2010

Not for Construction

PREVAILING WAGE JOB

BID SET

PALM SPRINGS ANIMAL CARE FACILITY

4575 E. MESQUITE AVE.
PALM SPRINGS, CA 92262

CITY OF PALM SPRINGS
PROJECT NO. CP. 07-24

APN: 680-020-010

Issue

Rev	Date	By	Description
1	11/23/09		BLDG. PERMIT SET
2	01/18/10		BID SET

Drawn By
Checked By
Job No.
Issue Date
Scale 1/8"=1'-0"

Reference North

Drawing Title

FLOOR POWER PLAN PART-A

E3.1

Sheet

These plans, drawings and specifications are the property of Swatt | Miers Architects and any use and/or reuse thereof in part or in whole without the written permission of the architects is strictly prohibited by law.
Copyright 2009 Swatt | Miers Architects

REGISTERED PROFESSIONAL ENGINEER GERALD L. GREEN No. E015691 Exp. 06-30-10 ELECTRICAL STATE OF CALIFORNIA

KRUSE & ASSOCIATES
12245 WORLD TRADE DRIVE, STE. A
SAN DIEGO, CALIFORNIA 92128
(858) 676-9776
FAX #676-9744

KEYPLAN