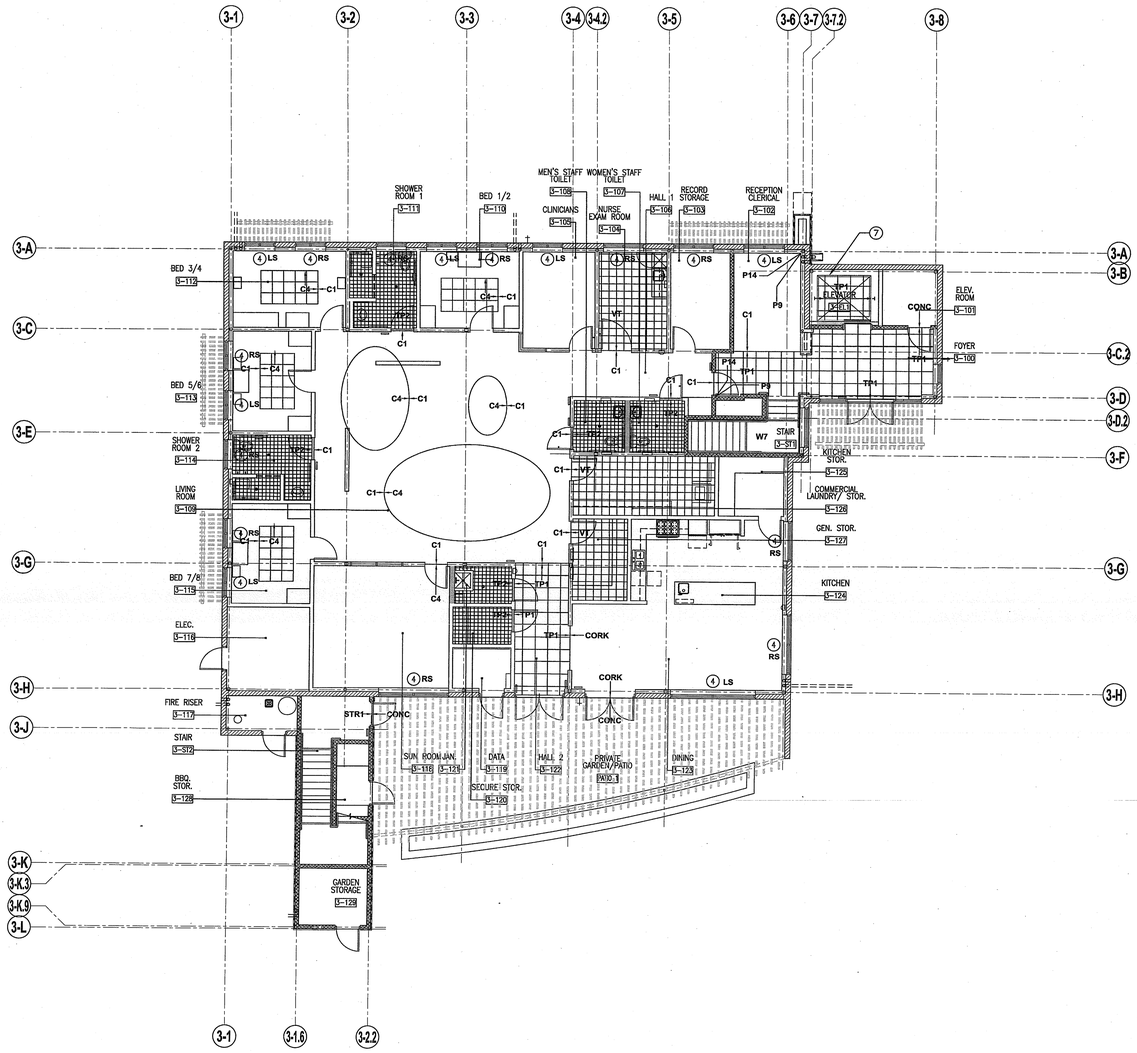

KEYNOTES

1. SLIDING PANEL WINDOW COVERINGS: LEVOLOR, SOLAR SCREEN 5 – BLACK PEARL 20862
2. SLIDING PANEL WINDOW COVERINGS: LEVOLOR, FATIGUE – 29749
3. SLIDING PANEL WINDOW COVERINGS: BALI WOVEN WOODS, CURACAO LODEN 21002, T2102 SLIDING PANELS, BACKING, EDGE BINDING.
4. SLIDING PANEL WINDOW COVERINGS: LEVOLOR, ORIGAMI – CINNAMON 29731
5. WALL TO WALL IN AREA OF HIGH CEILING, BLACK OUT DRAPERY, BRUSHED NICKEL FINISH GROMMETS ON BRUSHED NICKEL RODS, 13'–4" HIGH, FABRIC – HEAVY LINEN, COLOR – CHOCOLATE.
6. ROLLER SHADES: LEVOLOR, BLACKOUT, ELEGANCE PEARL 20001
7. ELEVATOR CAB WALLS TO BE WS

ABBREVATIONS:

R RIGHT HAND STACKING OF SLIDING PANELS
L LEFT HAND STACKING OF SLIDING PANELS
C CENTER OPENING OF SLIDING PANELS
EB 1"EDGE BINDING OF WOVEN WOOD SLIDING PANELS
PB PRIVACY BACKING OF WOVEN WOOD SLIDING PANELS

NOTES:

1. ALL SLIDING PANELS ARE OPENED/CLOSED WITH A WAND CONTROL
2. USER MAY OPT FOR INDIVIDUAL ROLLER SHADES IN LIEU OF SLIDING PANELS (FABRICS SPECIFIED WILL WORK FOR BOTH TYPES) WHERE WINDOWS DO NOT EXTEND TO THE FLOOR. IF SO, CONTROLS MUST BE PERMANENTLY ATTACHED TO WALL.

KEY PLAN



BUILDING 3 - FIRST FLOOR FINISH PLAN

SCALE: 1/8"=1'-0"

1

County of Orange

OC PUBLIC WORKS

Architecture & Engineering

Revisions			
Sym.	Descrip.	Date	By

0742

Consultants

Drawn ___ Chkd. ___ Date ___

A-E Seal

REGISTERED ARCHITECT STEVEN L. HIBBS NO. CA5811 RENEWAL DATE 2011 STATE OF CALIFORNIA

A-E ALEXANDER + HIBBS, AIA, INC.

ALEXANDER + HIBBS AIA INC
ARCHITECTURE AND PLANNING
2000 N. CLYBOURN, SUITE A
CHICAGO, ILLINOIS 60614

Design DF Chkd. AH Date Nov. 26, 2009

Sht Title BUILDING 3 - FIRST FLOOR FINISH PLAN

Project COUNTY OF ORANGE HEALTH CARE AGENCY
401 SOUTH TUSTIN STREET

401 SOUTH TUSTIN STREET
ORANGE, CA 92866

PROJ. NO. 100-042-P210-4200

Plan No. 52333-03608

Sheet A-2.3.12

0742 COUNTY OF ORANGE HEALTH CARE AGENCY 401 SOUTH TUSTIN STREET